



- [Description](#)
- [Dimensions](#)
- [Function diagram](#)
- [Ordering](#)

T-filter



▲ Description

This T-filter provides protection in hydraulic systems up to 350 bar. It is similar to filter models FIL-52; FIL-53 and FIL-54 in design and performance, with the added advantage of an element that can be removed for cleaning or replaced without breaking line connections. This is achieved by unscrewing the filter access cap.

The anodized aluminium housing is lightweight. The standard bronze element filter is 10 micron.


Operating temperatures: 0°C to 100°C

▲ **Dimensions**

Type:

1/4" BSP IN-LINE T-Filter: FIL-52T-10

3/8" BSP IN-LINE T-Filter: FIL-53T-10

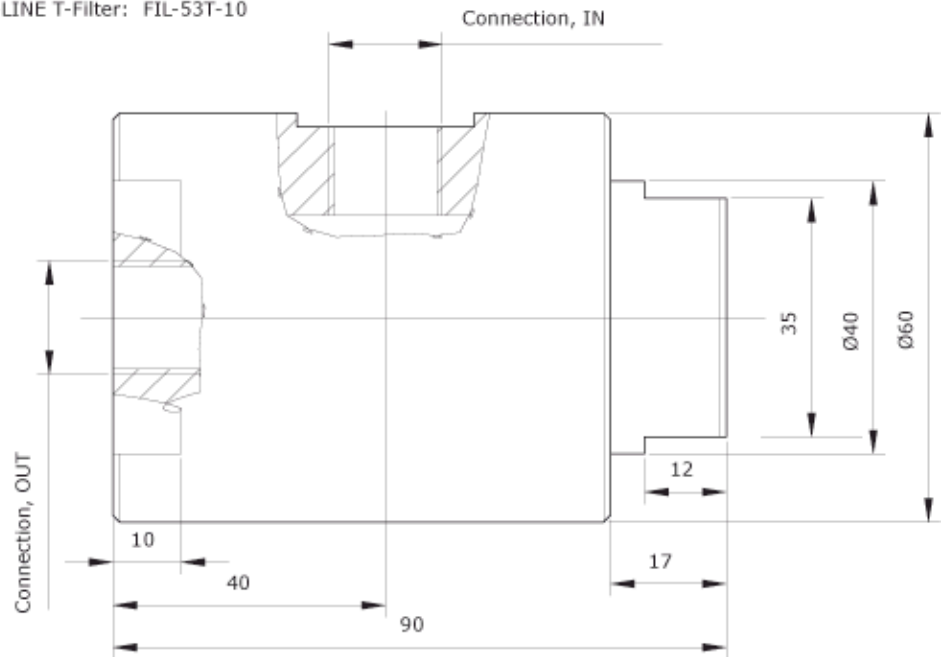


Type:

1/4" BSP IN-LINE Filter: FIL-52-10

3/8" BSP IN-LINE Filter: FIL-53-10

1/2" BSP IN-LINE Filter: FIL-54-10

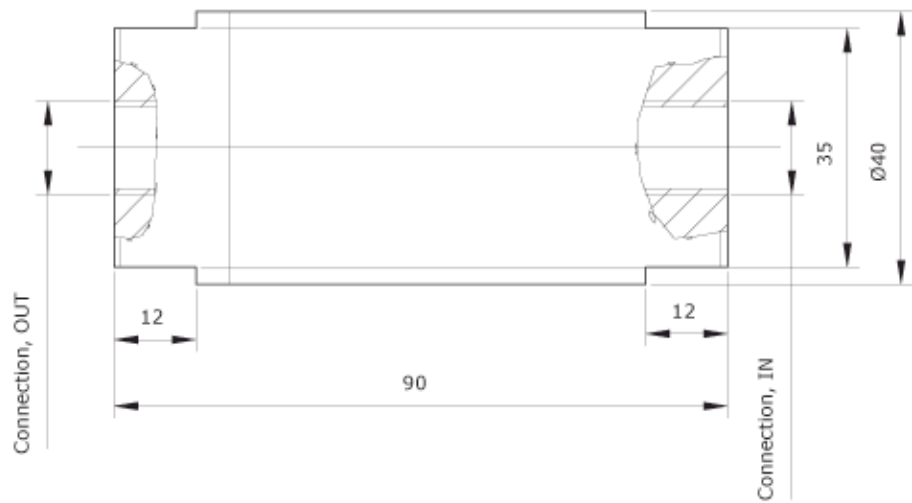

▲ **Function diagram**



▲ **Ordering**

ISO 9001
BUREAU VERITAS
Certification



| Order no. | In / Out | Overall length | Dia. | Weight | Max. pressure | Element and seal |
|------------|----------|----------------|-------|---------|---------------|------------------|
| FIL-52T-10 | 1/4" BSP | 90 mm | 60 mm | 0.55 kg | 350 bar | FIL-KIT-10 |
| FIL-53T-10 | 3/8" BSP | 90 mm | 60 mm | 0.55 kg | 350 bar | FIL-KIT-10 |
| FIL-KIT-10 | - | - | - | - | - | - |