
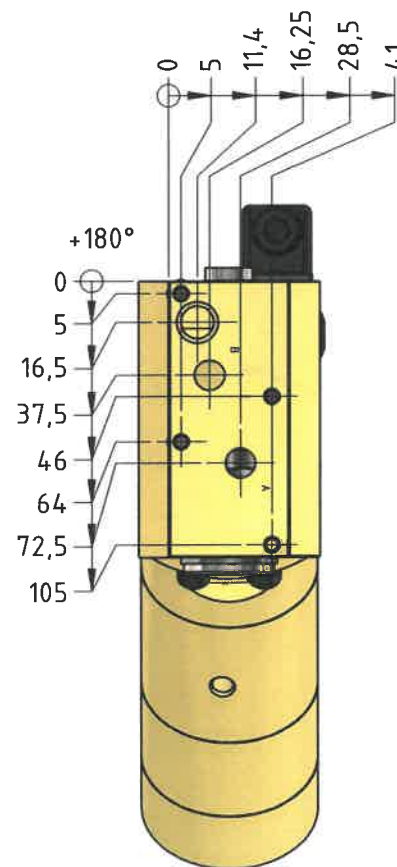
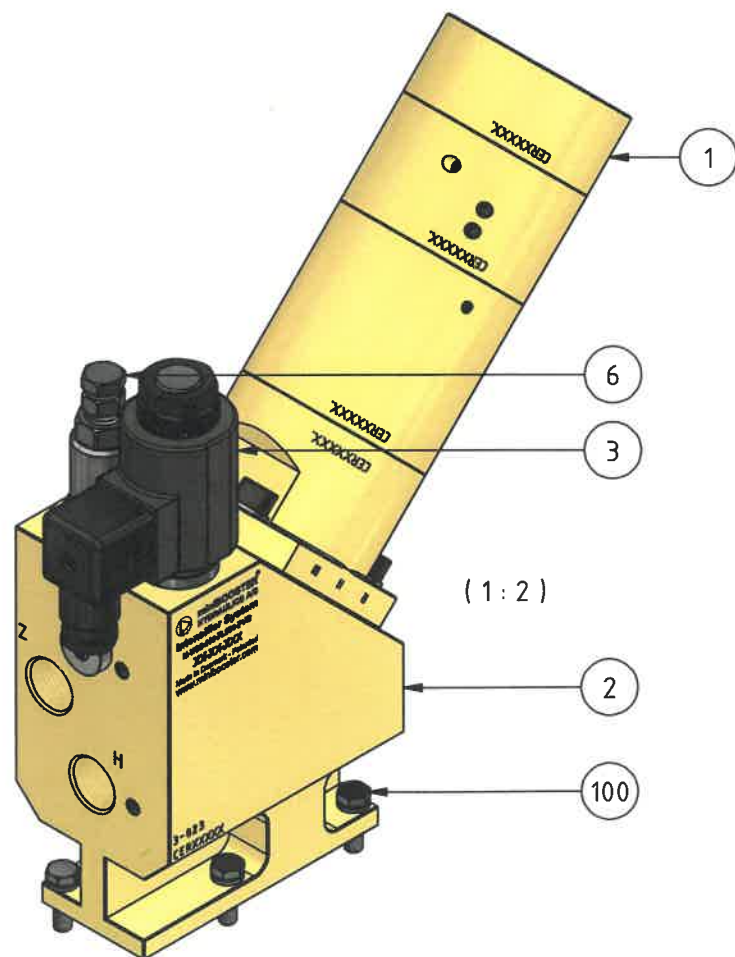
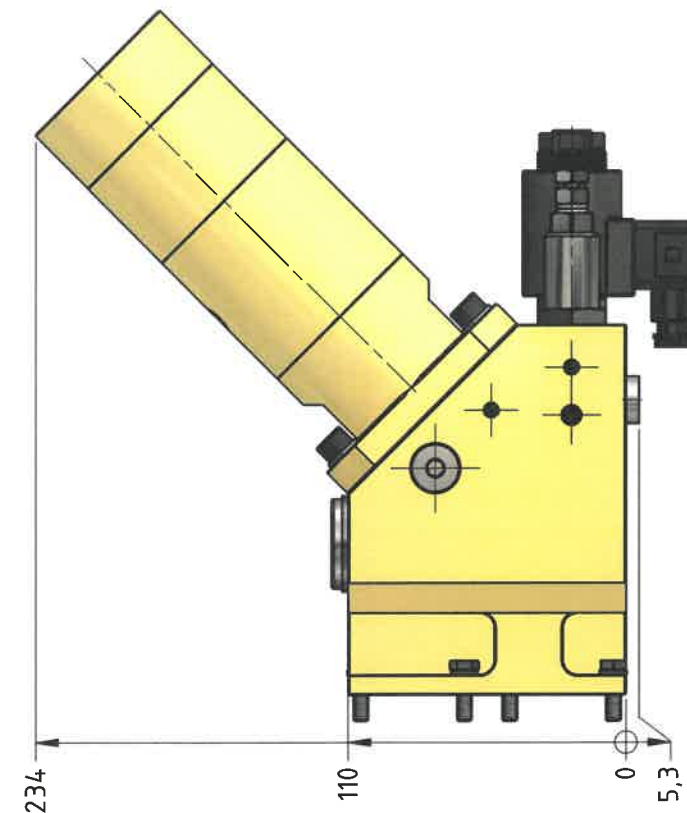
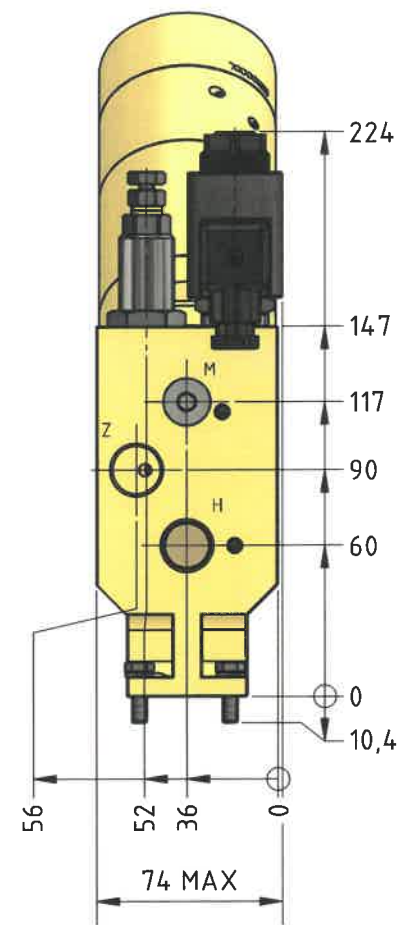


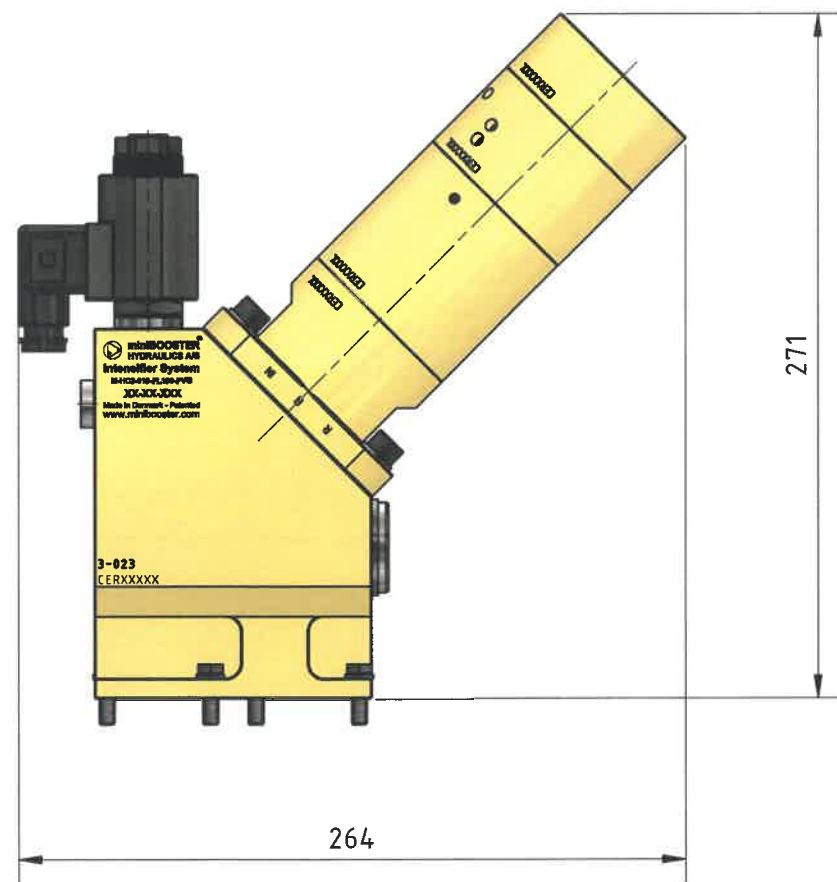

Port connections:

A & B: $\varnothing 12$ bore
Z & H: 1/2" BSPP
M: 1/4" BSPP

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	HC4-_-A-D4	Hydraulic Booster
2	1	3-023	Manifold
3	1	SV10-23-04 (DIN 43650)	Solenoid Directional Valve, 12 VDC
6	1	MVE 4 A	Relief Valve (0-700 bar)
100	4	2-628	Bolt M6x20 DIN 933
15.0	1	157B6849	PVB, basic module
15.1		157B7005	Standard spool, 5 l/min
15.2		157B7000	Standard spool, 10 l/min
15.3		157B7001	Standard spool, 25 l/min
15.4		157B7002	Standard spool, 40 l/min
15.5		157B7003	Standard spool, 65 l/min
15.6		157B7004	Standard spool, 100 l/min

Material		Issue	Material Code No.
Changes		Date	Name
			Finish
			Break all edges
			Hardening depth
			HV
Designer	Peter Wasmer	Scale 1 : 3	M-HC4D4-010-FL100-PVG
Approved by		Format A2	Intensifier System
Date	04-03-2025		Assembly Drawing
			Drawing No.: M-HC4D4-010-FL100-PVG-00